




# NATIONAL TERRAZZO & MOSAIC ASSOCIATION

[www.ntma.com](http://www.ntma.com)

800.323.9736

GUIDE DETAIL #E-4

01/24

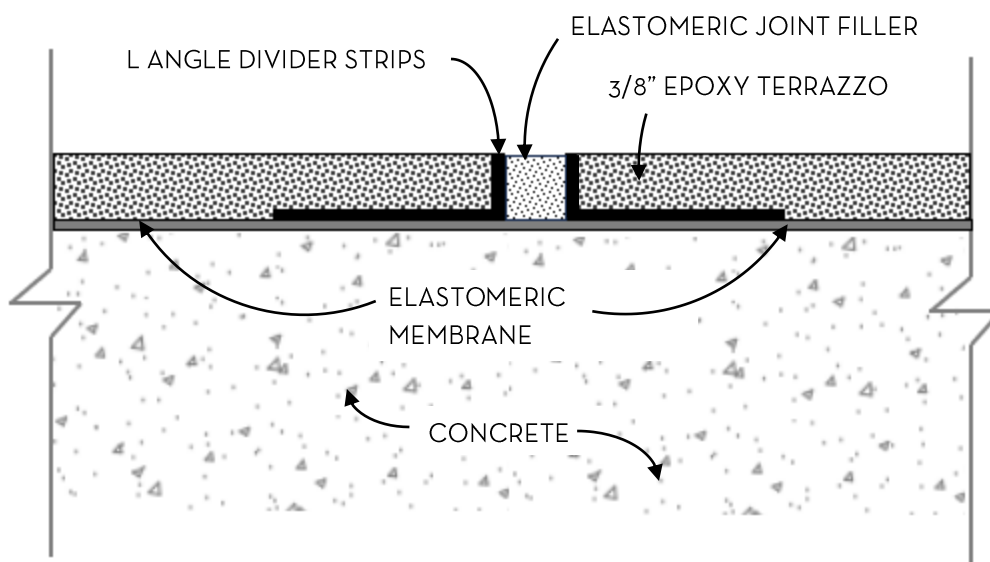

## **Control Joint Over Full Coverage Elastomeric Membrane**

### NOTES:

- This detail is for use where floor temperature changes are predicted to occur.
- Recommended for use when epoxy terrazzo is exposed to sunlight, such as through glass walls, skylights, etc.
- Spacing of these joints is a design team decision, local manufacturers and an NTMA contractor can be of assistance to the design team.
- Elastomeric Membrane at thickness recommended by epoxy terrazzo manufacturer.
- Fiberglass mesh reinforcement as per epoxy manufacturer recommendations.
- Divider strips are adhered to membrane with epoxy adhesive.

**General Disclaimer:** *The information provided in the Guide Detail is for general informational purposes only. Each project and individual application are unique. All information is provided in good faith: However, NTMA makes no representations or warranties of any kind, express or implied, regarding the accuracy, adequacy, validity, reliability, or completeness of any information provided herein.*