




NATIONAL TERRAZZO & MOSAIC ASSOCIATION

www.ntma.com

800.323.9736

GUIDE DETAIL #E-5

Mar. 2025

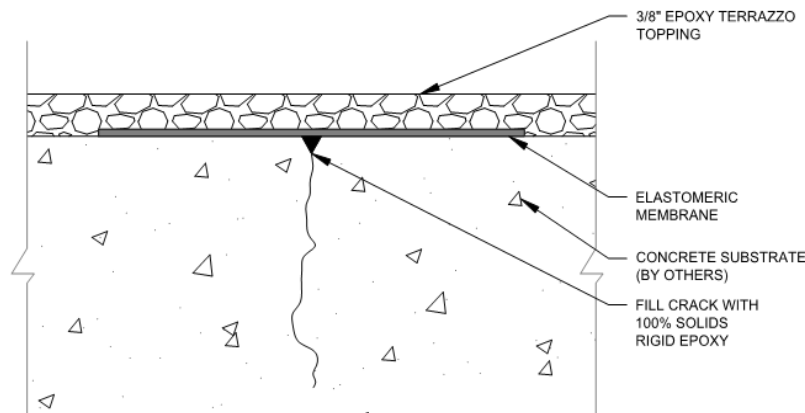

Terrazzo Detail at Concrete Cracks (Exceeding 1/16" in width)

NOTES:

- This detail is for use in-plane cracks due to horizontal movement only in concrete, vertical movement will reflect through the epoxy terrazzo.
- Movement of cracks after placement of terrazzo may reflect through epoxy terrazzo under critical lighting as a minor crease or a ridge (mole trail).
- Straight cracks may use divider strips (contraction/control joint) see Guide Details #E-1, E-2 or E-4.
- Elastomeric Membrane at thickness and width as recommended by the epoxy terrazzo manufacturer.
- Fiberglass mesh reinforcement may be used per manufacturer recommendations.

General Disclaimer: The information provided in the Technical Bulletin is for general informational purposes only. Each project and individual application are unique. All information is provided in good faith: However, NTMA makes no representations or warranties of any kind, express or implied, regarding the accuracy, adequacy, validity, reliability, or completeness of any information provided herein.